

EV20(-E) Series

DC Contactor Specification



一、认证信息 Certification information:

1. 符合欧盟 RoHS 指令（2011/65/EU）；

Meet RoHS (2011/65/EU);

二、产品型号含义命名 Nomenclature:

代码含义 Typical Part Number	EV20—	12	AD	—E	S	P
产品系列 Series:						
EV20=20A Contactor						
线圈电压 Coil Voltage:						
12=12VDC						
安装方式 Mounting:						
AD=底部安装 Bottom Mount						
E =经济型 Economic						
外形 Shape:						
无 =标准型 Normal						
S =紧凑型 Compact						
接线端子 Mounting:						
无 =插针式 Plug type						
P =PCB 焊接式 PCB Welding						

EV20(-E) Series

DC Contactor Specification



三、技术参数 Performance Data:

主 触 点 数 据 Main Contacts Data			预 期 工 作 寿 命 Expected Life	
主触点形式 Contact Arrangement		1 Form A (SPST-NO)	电耐久性(切换) Electrical Endurance (Make/Break) 20A@450VDC	5,000 Cycles
最大切换电压 Max. Switching Voltage		750VDC		
额定负载电流 Rated Current		20A	电耐久性(切换) Electrical Endurance (Make/Break) 10A@450VDC	10,000 Cycles
短时过电流 Short Term Current		30A (1h)		
耐电压 Dielectric Withstanding Voltage (Initial)	断开触点间 Between Open Contacts	2500VAC 1mA 1min	电耐久性(接通) Electrical Endurance (Make Only) 20A@450VDC	75,000 Cycles
	线圈与触点间 Between Contacts to Coil	3000VAC 1mA 1min		
绝缘电阻 Insulation Resistance (Initial)	触点与触点间 Terminal to Terminal	$\geq 1000 \text{ M}\Omega @ 500\text{VDC}$	机械寿命 Mechanical Life	200,000 Cycles
	触点与线圈间 Terminals to Coil			
压降 Voltage Drop (Initial)		$\leq 50\text{mV}@10\text{A}$		
极限分断 Limit breaking		30A@450VDC, 5 Cycle		
环 境 参 数 Environmental Data			吸 合 / 释 放 时 间 Operate & Release Time	
冲击 Shock	稳定性 Functional	196m/s ² Sine half-wave pluse	吸合时间 Operate Time	$\leq 30\text{ms}$ @20℃
	强度 Destructive	490m/s ² Sine half-wave pluse	释放时间 Release Time	$\leq 10\text{ms}$ @20℃
工作环境温度范围 Operating Temperature		-40~+85℃		
湿度 Humidity		5%~85%RH		
重量 Weight		约 50g		

备注 Note:

1.试验后不能保证产品仍然满足新产品时的耐压和绝缘电阻要求。

Do not meet dielectric & IR after the test.

2.电耐久通断比为 0.6s:5.4s

ON:OFF= 0.6s:5.4s.

3.试验环境条件下不能导致继电器内部产生结露、结冰，否则会导致继电器失效。

The ambient environment of application should not cause any dewing or icing inside the relay. Otherwise, the relay may fail to work consequently.

EV20(-E) Series

DC Contactor Specification




四、特性 Characteristics:

线圈参数 Coil Data	
额定工作电压 Nominal Voltage	12VDC
吸合电压 Pick-up Voltage (20℃)	≤9VDC
释放电压 Drop-out Voltage (20℃)	≥0.8VDC
线圈功率 (20℃, 额定电压下的标称值) Coil Power (20℃, Nominal Voltage)	3W
额定线圈电阻 Rated Coil Resistance ±10% (20℃)	48 Ω

五、性能曲线图 Performance Data:

(1) I-T 曲线图 (85℃), 导线截面积 ≥4mm², 数据仅供参考。

Carry current performance (85℃), the cross section area of wire is ≥4mm², the provider data are used for reference only.

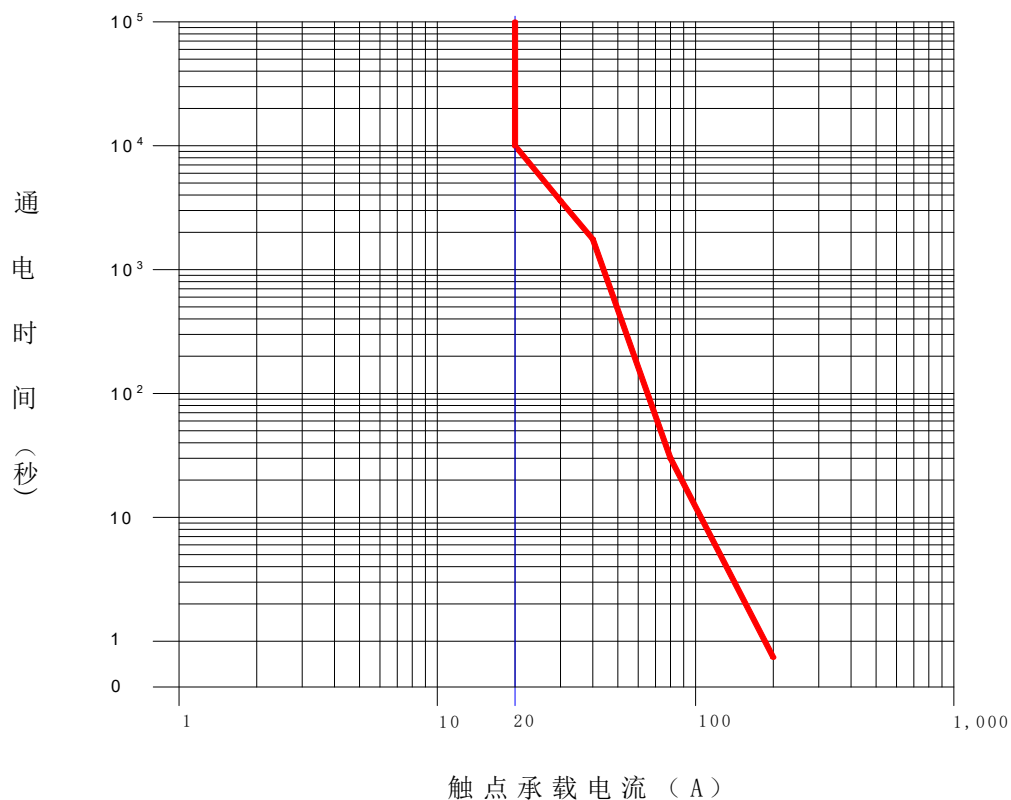


EV20(-E) Series DC Contactor Specification




六、外形尺寸与安装尺寸 Outline Dimensions (mm):


(1) EV20-12AD-E

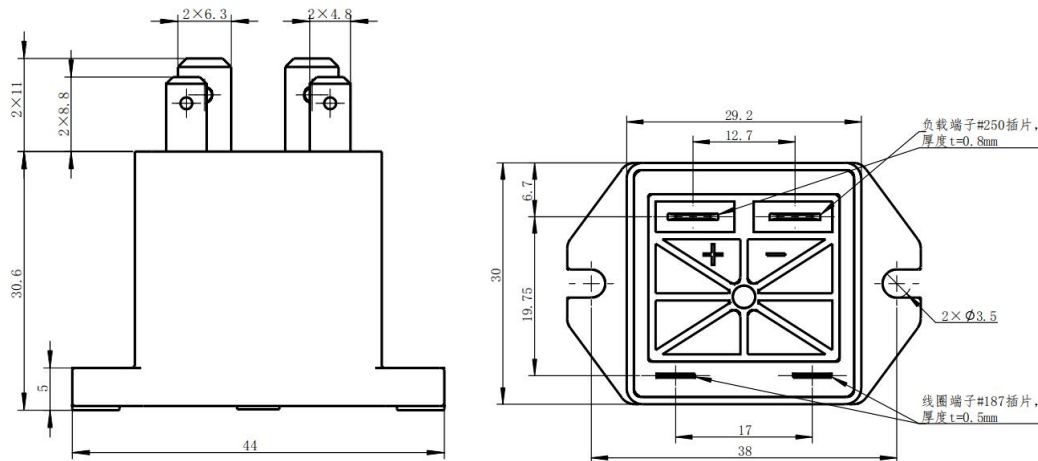

(2) EV20-12AD-ESP

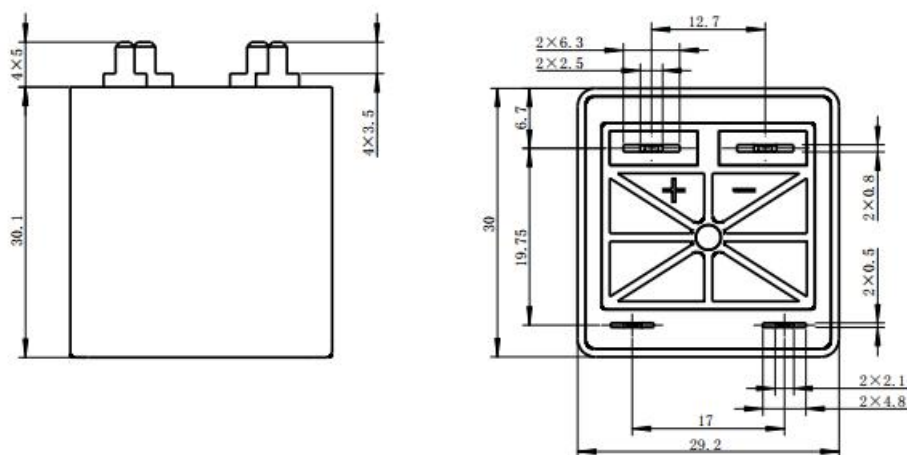

(3) EV20-12AD-ES

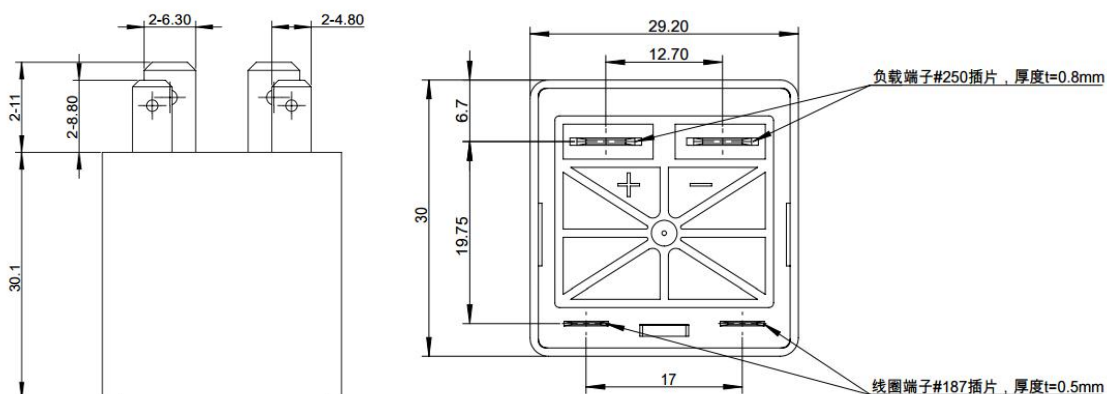

EV20(-E) Series

DC Contactor Specification



尺寸公差 Outline Dimensions Tolerance

外形尺寸 Outline Dimensions	公差 Tolerance
$\leq 10\text{mm}$	$\pm 0.3\text{mm}$
$10 \sim 50\text{mm}$	$\pm 0.5\text{mm}$
$\geq 50\text{mm}$	$\pm 0.8\text{mm}$

备注 Note:

1. 此产品负载为有极性，标注见外壳，低压端无极性。

There is “+” “-” mark on the cover of the product to show the polarity of the load, the coil has no polarity.

七、注意事项 Application Note:

1. 为防止出现松动，凡安装接触器时均要使用垫圈，使用螺钉安装时，确保垫圈厚度和强度足够，否则会变形，撑破外壳。拧紧螺母（螺柱）的扭力范围请参照样本的要求，超出扭力最大值有可能会引起产品损坏。各个部位的螺钉锁紧扭矩请控制在以下规定的范围内。安装处请使用 M3 螺钉，安装扭矩：0.8~1.1N.m。引出脚允许的插拔力：49N。

Be sure to use washer to prevent screws from loosening, all the terminals or copper bar must be in direct contact with the contactor's terminals. When use the screws, make sure the steel ring's thickness and strength are enough. Otherwise it will deform, and relay housing will be broken. Screw tightening torque is specified below. Exceeding the maximum torque can lead to product failure. Please use M3 screws in the Mounting place, mounting torque: 0.8~1.1N. m. The allowable plunger force of the terminal is 49N.

2. PCB 板焊接参数为：手工焊(380 ± 20)°C, 时间(3~5)s；波峰焊(265 ± 5)°C，时间(3~8)s。

PCB welding parameters: manual welding, (380 ± 20)°C, time (3~5) s; wave soldering (265 ± 5)°C, time (3~8) s.

3. 负载端标明有极性的产品请务必按照产品标示进行正确使用。负载连接极性反向时，将不能保证本说明书中承诺的电气特性。

Load side marked with polarity of the product, please be sure to follow the product label for correct use. When the polarity of the load connection is reversed, the electrical characteristics promised in this specification cannot be guaranteed.

4. 此为不带线路板产品，线圈关断时会出现反向电动势，建议设计浪涌保护电路来吸收接触器线圈的反向电动势。

This is a product without circuit board. When the coil is turned off, the the reverse electromotive force will appear. It is recommended to design a surge protection circuit to absorb the reverse electromotive force of the relay coil.

5. 避免把接触器安装在强磁场的环境（靠近变压器或磁铁处），同时避免将接触器靠近有热辐射的物体。

Avoid installing in a strong magnetic field (close to a transformer or magnet), or near a heat source.

6. 对继电器的线圈和触点连续通电流，电源被切断后又马上接通，此时由于线圈的温度增加，线圈的电阻会增大，从而使得产品的吸合电压升高，有可能导致超出额定吸合电压。在这种情况下，应采取以下措施：降低负载电流；限制持续通电时间或采用比额定吸合电压更高的线圈电压。

EV20(-E) Series

DC Contactor Specification



The coil and contact of the relay are continuously energized, and the power supply is cut off and immediately connected. At this time, the resistance of the coil will increase due to the increase of the temperature of the coil, so that the suction voltage of the product will increase, which may lead to the excess of the rated suction voltage. In this case, the following measures should be taken: reduce the load current; Limit continuous power or use coil voltage higher than rated suction voltage.

7. 施加在线圈两端的电压超过最大允许施加电压时，可能会因线圈温度上升而导致线圈损坏和层间短路。

When the voltage applied to both ends of the coil exceeds the maximum allowable applied voltage, the coil temperature may rise and lead to coil damage and inter-layer short circuit.

8. 触点参数中的额定值均为阻性负载时的数值。使用 $L/R > 1\text{ms}$ 的感性负载的情况下，请为该感性负载并联一个浪涌电流保护装置。未采取措施的情况下，可能会造成电气寿命下降，发生通断不良，请在设计中考虑足够的余量空间。

The rating in the contact parameters is the value at the time of the resistive load. When using an inductive load with $L/R > 1\text{ms}$, connect a surge current protection device in parallel with the inductive load. If no measures are taken, the electrical life may be degraded and the continuity may be poor. Please consider sufficient margin space in the design.

9. 产品线圈的驱动电路功率必须大于产品线圈功率，否则会降低产品的切断能力。

Drive power must be greater than coil power or it will reduce performance capability.

10. 请不要让杂物和油污附着到主引出端；请务必保证外接线端子与产品的主引出端可靠接触，否则有可能会因接触电阻过大而导致引出端温升过大。

Please do not allow debris and oil to adhere to the main lead end; Make sure that the external terminals are in reliable contact with the main outgoing end of the product, otherwise the temperature rise of the outgoing end may be too high due to the excessive contact resistance.

11. 与产品高压端相连接的引线必须有相应的电流负载能力及散热能力，请使用 4mm^2 以上规格的导线，防止发生过热影响接触器寿命。

The lead wire connected with the high voltage end of the product must have the corresponding current load capacity and heat dissipation capacity, please use the connecting wire which is min 4mm^2 , to prevent overheating affecting the life of the contactor.

12. 使用环境条件下不能导致继电器内部产生结露、结冰，否则会导致继电器失效。

The ambient environment of application should not cause any dewing or icing inside the relay. Otherwise, the relay may fail to work consequently.

13. 在接触器意外跌落的情况下，原则上请不要再使用。

Do not use if dropped.

14. SCII 不可能确定继电器在每一个具体应用领域的所有性能参数，所以客户应根据自身的使用条件选择与之相匹配的产品，若有疑问，请联系 SCII；但因产品选型责任仅由客户负责。

SCII is impossible to determine all the performance parameters of relays in each specific application area. Therefore, customers should choose the products matching them according to their own conditions of use. If in doubt, contact SCII; However, customer will responsible for what they choosed it is the user's responsibility to determine

15. SCII 保留对产品更改的权利，客户在首次下单之前应确认此规格书内容，必要时可要求我司提供新的规格书。

SCII reserves the right to make changes. Customers should reconfirm the contents of the specification before first orders and ask for us to supply a new specification if necessary.